



	MODEL 115	MODEL 125
UNIT DEPTH (Not including Posting Board)	36.42"	45.47"
UNIT WIDTH OPTIONS		
Narrow:	71.26"	83.85"
Standard:	100.79"	103.54"
Wide:	116.02"	116.02"
Extra Wide:	128.70"	128.70"
POSTING BOARD HEIGHT		
Clear for seated operation:	29.5"	29.5"
Clear for standing operation:	39.4"	39.4"
POSTING BOARD DEPTH		
	11.9"	11.9"
CARRIER DEPTH OPTIONS		
	12.68"	12.68" LTL 15.5" LGL Tray/Hanging
CARRIER WIDTH OPTIONS		
Narrow:	57.09"	69.68"
Standard:	86.61"	89.37"
Wide:	101.85"	101.85"
Extra wide:	114.53"	114.53"

QUALITY FEATURES

- MegaStar products offer compliance with Americans with Disabilities Act (ADA), Uniform Federal Accessibility Standards (UFAS) and Section 508 of the Rehab Act
- MegaStar products are available on GSA Schedule

STANDARD SPECIFICATIONS

- Required room height - unit height + 0.79"
- Cycle speed - 7.0"/sec
- Stop tolerance - ± 0.59"
- Sound level - 60 dB (approx.)
- Drive - DC gear motor - 1.341 HP (2 speed)
- Power supply - 110V/single phase 20 AMP
- Ambient temperature -
Operating: 41° to 122° F
Non-operating: -4° to 158°F
- All maintenance and service from front panel(s) for easy access
- Units can be placed directly side-by-side or back-to-back
- Top dust cover
- Lockable doors with posting board in seated or standing position
- T-O control housed in movable magnetic matchbox or recessed in posting board
- Colors - variety of standard packages available
- Standard 2 year warranty on parts and labor
- ISO-9001 & 14001 - Certified for equipment manufactured by Bellheimer Metallwerk GmbH

OPTIONS (partial listing)

- Keyboard and/or electronics located in overhead position
- Full width fluorescent light
- Computer-interfacable controls with 4 line by 20 character alpha/numeric readout
- Passcode protection for controller
- Data based micro-processor controls
- Cycle counter / run time meter
- Adjustable posting board
- Balance meter
- Position lights/depth indicators
- Carriers available for these applications:
Letter/legal lateral
Multi-purpose, Letter/legal tray
File drawer, 8 x 8 finger print
Double tier, 8 x 5
Hanging frame, 6 x 4
Triple tier, Microfilm
Quad tier, 5 x 3
- Custom designer colors
- Optional 3 year extended warranty
- Keyboard lockout security feature


SAFETY FEATURES

- Upper and lower safety bars
- Infra-red photocells - 2 sets
- Safety status indicator with text readout
- Safety features for:
All access panels
Handcrank
Overheating motor
Diagonal photo cells
- Emergency stop button (2)
- UL tested and approved
- CE Compliant to European standards



MediaStation™

General Specifications

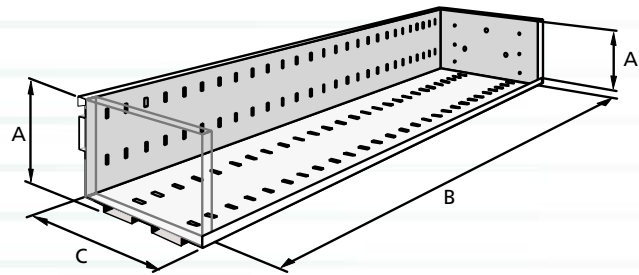

A = Clear Height B = Clear Width C = Clear Depth

Standard Carrier Widths

Style:	Abbreviation:	Model 115 Inches:	Model 125 Inches:
Narrow	N	57.09	69.68
Standard	S	86.61	89.37
Wide	W	101.85	101.85
Extra Wide	X	114.53	114.53

Model 115 - All carrier depth 12.68"

8" Carrier Pitch	Widths, N, S, W, X	9" Carrier Pitch	Widths, N, S, W, X	10" Carrier Pitch	Widths, N, S, W, X	11" Carrier Pitch	Widths, N, S, W, X	12" Carrier Pitch	Widths, N, S, W, X	13" Carrier Pitch	Widths, N, S, W, X	14" Carrier Pitch	Widths, N, S, W, X
Carriers	Unit Height In.	Carriers	Unit Height In.	Carriers	Unit Height In.	Carriers	Unit Height In.	Carriers	Unit Height In.	Carriers	Unit Height In.	Carriers	Unit Height In.
17	86.61	13	-	9	-	9	-	9	-	9	-	9	86.61
18	88.58	14	-	10	-	10	-	10	-	10	88.61	10	92.52
19	92.52	15	86.61	11	-	11	-	11	86.61	11	92.52	11	100.39
20	96.46	16	90.55	12	-	12	86.61	12	92.52	12	100.39	12	106.30
21	100.39	17	94.49	13	86.61	13	90.55	13	98.43	13	106.30	13	114.17
22	104.33	18	98.43	14	88.58	14	96.46	14	104.33	14	112.20	14	120.08
23	108.27	19	102.36	15	94.49	15	102.36	15	110.24	15	120.08	15	127.95
24	112.20	20	108.27	16	98.43	16	108.27	16	116.14	16	125.98	16	135.83
25	116.14	21	112.20	17	104.33	17	114.17	17	122.05	17	131.89	17	141.73
26	120.08	22	116.14	18	108.27	18	118.11	18	129.92	18	139.76	18	149.60
27	124.02	23	122.05	19	114.17	19	124.02	19	135.83	19	145.67	19	155.51
28	129.92	24	125.98	20	118.11	20	129.92	20	141.73	20	151.57	20	163.39
29	133.86	25	129.92	21	124.02	21	135.83	21	147.64	21	159.45	21	169.29
30	137.80	26	135.83	22	129.92	22	141.73	22	153.54	22	165.35	22	177.17
31	141.73	27	139.76	23	133.86	23	145.67	23	159.45	23	171.26	23	-
32	145.67	28	143.70	24	139.76	24	151.57	24	165.35	24	177.17	24	-
33	149.60	29	147.64	25	143.70	25	157.48	25	171.26	25	-	25	-
34	153.54	30	153.48	26	149.60	26	163.39	26	177.17	26	-	26	-
35	157.48	31	157.48	27	153.54	27	169.29	27	-	27	-	27	-
36	161.42	32	161.42	28	159.45	28	173.23	28	-	28	-	28	-
37	165.35	33	167.32	29	163.39	29	-	29	-	29	-	29	-
38	169.29	34	171.26	30	169.29	30	-	30	-	30	-	30	-
39	173.23	35	175.20	31	173.23	31	-	31	-	31	-	31	-
40	177.17	36	-	32	-	32	-	32	-	32	-	32	-

Linear Filing Inches By Application (per carrier)

Model	115N	115S	115W	115X	125N	125S	125W	125X
Letter Lateral	57	87	102	115	70	89	102	115
Legal Lateral	57	87	102	115	70	89	102	115
Letter Tray	48	83	95	107	72	100	115	130
Legal Tray	36	60	71	83	58	72	86	101
Letter Hanging Tray	48	71	83	95	72	86	101	115
Letter Hanging Carrier	-	72	84	96	72	86	101	115
Legal Hanging Carrier	-	60	72	84	57	72	86	101
Letter File Drawer Carrier	-	74	84	95	70	98	112	126
Legal File Drawer Carrier	-	53	63	74	56	70	84	98
5 x 3 Tray	121	194	230	255	187	245	274	302
6 x 4 Tray	109	158	194	218	158	202	230	259
Aperture/Tab Tray	85	133	158	182	130	158	187	216
8 x 5 Tray*	73	121	145	158	115	144	173	187
6 x 4 Microfiche Tray	109	158	194	218	154	196	224	252
8 x 8 Fingerprint	73	121	145	158	115	144	173	187
4 x 4 Microfilm	158	242	279	315	230	302	331	374
Binder - Letter/Legal	57	87	102	115	70	89	102	115

Formula for total LFI = LFI/Carrier x Number of Carriers

*For Double Tier applications 13" Pitch 8 x 5 Carrier = LFI x 2

Model 125 Carrier Depth 15.20"

11" Carrier Pitch	Widths, N, S, W, X
Carriers	Unit Height In.
11	79.72
12	84.65
13	90.55
14	95.47
15	101.38
16	107.28
17	113.19
18	118.11
19	124.02
20	128.94
21	134.84
22	140.75

ADA Compliant

All models can be customized to meet most any application.

All specifications are nominal and subject to change without notice.